

BID OPENING CERTIFICATION RECORD

Date of Bid Walk: 7/9/2020 Due Date: 7/16/2020 HNS #: 21-3 Garibaldi

HNS #: 21-4 1806 and 1912 Irma

	Address	PBE Amount	- 15% / + 15%
PUBLIC BODY ESTIMATE:	1900 Garibaldi Ave	\$18,475	\$15,703 / 21,247
PUBLIC BODY ESTIMATE:	1806 Irma St	\$23,228	
PUBLIC BODY ESTIMATE:	1912 Irma St	\$42,865	
PUBLIC BODY ESTIMATE:	TOTAL of Irmas	\$66,093	\$56,179 / \$76,007

BIDDERS

	Address:	AVM	JP Builder	Jasper	Yeshua	<u>GTB</u>
1.	1900 Garibaldi	\$15,725	\$18,625	\$17,950	\$18,150	\$13,315
2.	1806 Irma	\$23,495	\$22,923	\$30,400	\$23,600	\$20,552.50
3.	1912 Irma	\$39,450	\$46,505	\$46,300	\$45,075	\$38,011.25
4.	TOTAL of Irmas	\$62,945	\$69,428	\$76,700	\$68,675	\$58,563.75

This is to certify that bids for the job identified above were publicly opened and read aloud in the Neighborhood & Business Services Office located at 600 E. Trade Street, Charlotte, NC

Bids Opened By: Elizabeth Lamy Bids Recorded By: Elizabeth Lamy

Date: 7/16/2020

Note: Responsive bids are those which fall within a range of 15% above and 15% below the public body cost estimate. As a general rule, the lowest responsive bid is recommended to the property owner for consideration.



TLC by CLT

CITY OF CHARLOTTE

HOUSING & NEIGHBORHOOD SERVICES

Addendum 1 Invitation to Bid HNS 21-4

NOTE: Contractors are not authorized to visit the property before or after the bid walk, without being accompanied by the City's Rehabilitation Specialist.

Documents included in Package:

GITB

- 1) Instruction to Bidders
- 2) Specs by Location/Trade (Scope of Work)
- 3) Subcontractor Certifications (if applicable)
- 4) Floor Plan / Site Drawing (if applicable)

Bid Walk & Bid Opening:

Project Address:	20 10250	=0 = 75
1806 Irma St	20,532	= 58,563
1912 Irma St	38,011,25	= 58,56375
Bid Walk: 1806 I	rma - 7/9/2020 at 11:00 am	(THURSDAY)
1912 l	rma - 7/9/2020 at 12:00 pm	
Bid Opening: 7/1	6/2020 at 2:00 pm (THURSD	AY)
Client Name: 1806 I	rma – Howard & Howard	
	Enterprises	Lead and Rehab
1912	rma – Mr. Emery Spears	
Project Manager: E	lizabeth Lamy	Contact Number: 704-620-9090

Bid Walk and Bidding Instructions:

All bid walks are mandatory.

If you are going to be late the policy is the following:

Contact me BEFORE the start time if you are going to be late. If you are going to be more than 10 minutes late, we will proceed without you and you will not be permitted to bid.

The day of a bid walk the best way to reach me is at 704-620-9090.

Bids must be received by the date, time and place specified. All others will be considered non responsive and disqualified.



The Bids will be received via email no later than the above-mentioned date and time. Emailed bids will not be opened until the listed Bid Opening time.

Company Acknowledgement:	
provisions of the housing improvement wo funded through the City of Charlotte Housi inspected the site in all particulars, hereby proprime stated and in strict accordance with the pland all labor and materials, and to do all work advised respective contractual, for the sum of All labor, materials, services and equipment on the Drawings and in the Specifications:	nt necessary for the completion of the Work shown
Written total	mundruls: afy-thin Bollars (\$ 58, 563
Specs Dated: Number of Pages:	
Addenda # 1 Dated: 7/12/2020	Number of Pages: 27
Addenda # 2 Dated:	Number of Pages:
Project Schedule: (A DATE must be included h	ere or the bid will be nonresponsive)
08-01-2020	
Completion Deadline: (please provide project	ed completion date with bid submission)
09-30-2020	,

Please Print and Sign:
Company Name/Firm: GTB Construction Like
Authorized Representative Name. Milton Brand
Signature: Date: 1-16-20



Requirements For Bidders

The City awards rehabilitation bids to the lowest responsive and responsible bidder. A responsible bidder for the safe home program is one who:

- 1) Is a licensed general contractor in the State of North Carolina;
- Has an Renovate, Repair & Paint Certification (http://www2.epa.gov/lead/renovation-repair-and-painting-program);
- 3) Is not listed on a local, state or federal debarment list;
- 4) Carries an appropriate amounts of insurance;
- 5) Can provide references verifying the contractor has completed work of a similar scope in a good workmanship like manner or successfully completed prior work for the Safe Home program. Referenced work must have been completed in one year or less from date of this invitation to bid.

A responsive bidder must:

- 1) Submit all requested documentation on time;
- 2) Meet the above requirements for responsibility at the time of bid submittal;
- 3) Have the capacity to meet the required schedule for the project.
- 4) Existing rehab projects contracted by the contractor must be on schedule.

The City reserves the right to waive any minor informalities or irregularities, which do not go to the heart of the bid submittal or prejudice other offers, or to reject, for good and compelling reasons, any or all bid submittals.

Elizabeth Lamy Santos
Rehabilitation Specialist
City of Charlotte
Housing & Neighborhood Services
600 E. Trade St.
Charlotte, NC 28202
PH: (704) 336-3333 desk
(704) 620-9090 cell
elamy@charlottenc.gov

HOUSING & NEIGHBORHOOD SERVICES

http://housing.charlottenc.gov | 600 E. Trade Street | Charlotte, NC G:\SELECTIVE REHAB TEAM\forms\bid forms and documents\Invitation to bid WARREN

Prepared By:

City of Charlotte Housing & Neighborhood Services 600 E. Trade Street Charlotte, NC 28202 (704) 336-7600

Property De	eta	ils
-------------	-----	-----

Address:

1806 Irma St

Charlotte, NC 28216

Structure Type:

Single Unit

Square Feet:

1334

Year Built:

1956

Property Value:

96900

Tax Parcel:

07505107

Census Tract:

Property Zone:

Council District 2

Owner:

Howard & Howard Enterprises LLC 25k

Owner Phone:

Cell: (704) 506-8078 xOwner

Program(s):

Tested- HAS LEAD

LeadSafe 2019

Healthy Homes LBP 2019

Targeted FY20

Attic Insulation Increase to R-38

ATTIC

Increase attic insulation to R-38, contractor to attach verification to rafter at attic access, easily seen. Include ventilation baffles to code.



Bid Cost: X = Total Cost

17" Height Commode Replace

BATHROOM

Install a 17" height, 2 piece, close coupled, white, vitreous china commode with a maximum water usage per flush of 1.6 gallons. Include plastic or pressed wood white seat, supply pipe, shut-off valve, flap valve and wax seal.



Bid Cost: X = 465Base Quantity Total Cost

Prep & Paint Ceiling

BATHROOM - MAIN

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked, and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with Owner's choice of low VOC acrylic flat latex in all habitable rooms and low VOC acrylic semi-gloss latex in kitchen and baths. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost: X = 745

Base Quantity Total Cost

Register Cover Install

BATHROOM - MAIN

Install/replace appropriately sized baseboard return air diffuser with latch-controlled single damper.




Bid Cost: ____ X ___ = 6 7

Base Quantity Total Cost

Bath Exhaust Fan/Light Combination Replace

BATHROOM - MAIN

Install a ceiling mounted, exterior ducted, vent fan with damper and overhead light. Include power and switch wiring using #14 copper Romex. Repair any tear out.



Bid Cost: ____ x __ = 3 0 5 Base Quantity Total Cost

Prep & Paint Room Semi Gloss

BATHROOM - MAIN

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with owner's choice of low VOC acrylic SEMI-GLOSS latex. Painting shall include walls and any associated trim. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost: X = 2 % Total Cost

GFCI Receptacle 20 AMP

BATHROOM - MAIN

install a flush mounted, ground fault circuit interrupted, duplex receptacle and cover plate. Fish wire and repair all tear out as needed.							
	Bid Cost:	x_	=	270			
		Base	Quantity	Total Cost			
Prep & Paint Room Flat			BEDROOM				
Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with owner's choice of low VOC acrylic FLAT latex. Painting shall include walls and any associated trim with SEMI-GLOSS latex. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.							
***Removal of damaged drywall/wallboard OR excessive sandi compound contains Regulated Asbestos Containing Materials (separate line item.	ng requires use (RACMs). The	of an Asbestos A price for asbestos	Abatement contra s abatement sha	actor. Drywall Il be listed in a			
	Bid Cost:	X	=	350			
		Base	Quantity	Total Cost			
Prep & Paint Ceiling			BEDROOM				
Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked, and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with Owner's choice of low VOC acrylic flat latex in all habitable rooms and low VOC acrylic semi-gloss latex in kitchen and baths. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.							
***Excessive sanding requires use of an Asbestos Abatement of Materials (RACMs). The price for asbestos abatement shall be			ntains Regulated	Asbestos Containing			
	Bid Cost:	x_		280			
		Base	Quantity	Total Cost			

Ceiling Installation, Paint, and Crown Molding

BEDROOM 2

Install 1/2" drywall to Code OVER TOP of existing ceiling finish. Tape. Add 3 coats of compound and sand smooth. Prep and paint new ceiling with two coats of white latex.

New crown molding shall be installed to ensure new ceiling and molding style match existing style as close as possible.

***Removal of damaged drywall/wallboard requires use of an Asbestos Abatement contractor. Drywall compound contains Regulated Asbestos Containing Materials (RACMs). The price for asbestos abatement shall be listed in a separate line item.



Bid Cost: ____ X = ____ S10

∕Prep & Paint Room Flat

BEDROOM 2

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with owner's choice of low VOC acrylic FLAT latex. Painting shall include walls and any associated trim with SEMI-GLOSS latex. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost: _____ X __ = \(\frac{Q}{Q} \)

Base Quantity Total Cost

Prep & Paint Room Flat

BEDROOM 3

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with owner's choice of low VOC acrylic FLAT latex. Painting shall include walls and any associated trim with SEMI-GLOSS latex. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.

***Removal of damaged drywall/wallboard OR excessive sanding requires use of an Asbestos Abatement contractor. Drywall compound contains Regulated Asbestos Containing Materials (RACMs). The price for asbestos abatement shall be listed in a separate line item.

Bid Cost:		x	= 490		
	Base	Quantity		Total Cost	

Vapor Barrier

CRAWL SPACE

Lay 6 mil poly vapor barrier on ground in crawl space and 6" up foundation walls. Overlap seams by 2' and secure with duct tape.



Bid Cost: X = 10 \(\)

Base Quantity Total Cost

Insulate Floor R-19

CRAWL SPACE

Install R-19 Kraft faced batt fiberglass insulation to floor where missing. Vapor barrier must face heated space. Use strong wire, "tiger teeth" or mesh to hold insulation in place.



Bid Cost: X = Total Cost

Prehung Metal Door Entrance - Front Door

EXTERIOR

Exterior

Remove existing door, frame and threshold. Install new Energy Star rated pre-hung exterior door. Insulate cavity. Install mortised dead bolt and lever handled door hardware keyed alike. Install wide peep sight. New casing and shoe molding will match existing. Apply primer and topcoat. This installation to include repairing any damaged header, door framing, to include wall framing, sub-floor, floor joists and sill.



Bid Cost: ____ = 945

Base Quantity Total Cost

Install Handrails - Kitchen Side Entrance

EXTERIOR

Exterior

Install Code approved handrails on one side of the stair, secured to the wall, constructed of either metal or treated lumber. Ensure that new rail is easily graspable.



Bid Cost: X = 405

Base Quantity Total Cost

Exterior Wide-Tread Steps - Carport

EXTERIOR

Exterior

Install steps and handrails constructed with treated lumber, located off of the rear end of the carport's concrete slab. Railings shall be built to current Building Code. Steps shall have treads that are wider than typical steps - approximately 18" wide, and have a riser height of no more than 6". There shall be a hand rail on each end of the stair (left and right), as well as posts and a railing installed in the middle of the stair. Stair shall be the entire width of the slab, approx. 10' wide.

	Bid Cost: _	>	<u> </u>	87750
		Base	Quantity	Total Cost
Prep & Paint Exterior - Aluminum Surfaces			EXTERIOR	Exterior
Prep and paint all white colored aluminum surfaces, INCLU materials. Secure or replace all loose, broken, rotted or detapplying 25-year or better Low VOC paint. Home will be paranner. Use care to protect all surfaces not intended for paths. For painting aluminum siding, please use an oil-based paluminum. ***Also include painting the exterior side of the utility room.	teriorated material ainted Owner's cho aint coverage. rimer and 100% a	ls. Caulk and fill pice of color. All	all cracks, voids, he work to be done in	oles, etc. prior to a neat & professional
***DO NOT include painting existing painted masonry (tan	in color).			
	66.617.			1,21500
	Bid Cost:	~ x	- =.	160
		Base	Quantity	Total Cost
Smoke Detector Hard Wired			GENERAL R	EQUIREMENTS
Install UL approved, interconnected, ceiling mounted smoke battery backups in bedrooms and outside of sleeping areas ***Count is for (3) detectors.	e and heat detecto	ors permanently	wired into a recept	acle boxes with
			2	V13
	Bid Cost: _	X	=_	010
		Base	Quantity	Total Cost
Combination CO / Smoke Detector Hard Wired			GENERAL R	EQUIREMENTS
Install a hard wired combination carbon monoxide and smol	ke detector with b	attery back up.		
	Bid Cost:	X		270
		Base	Quantity	Total Cost

Electric Service 200 AMP

GENERAL REQUIREMENTS

Replace electrical service with new 200 amp, main disconnect, 110/220 volt, 24 circuit panel board, meter socket, weather head, service cable, ground rods and cable. Include replacement of all sub-panels. Caulk exterior service penetration.



Bid Cost: X = Total Cost

Exterminate Termites

GENERAL REQUIREMENTS


Exterminate for termites. Drill and patch foundation and pavement where necessary. Exterminator must be licensed and provide a 1 year guarantee with an optional yearly renewable warranty for the homeowner.

Bid Cost: X = $\frac{75}{}$ Base Quantity Total Cost

Replace Receptacles, Switches, and Plates

GENERAL REQUIREMENTS

Replace all receptacles, switches and cover plates throughout entire house. Use code appropriate devices. This also includes any wall or ceiling damage repairs.



Bid Cost: X = Total Cost

Asbestos Abatement Scope

GENERAL REQUIREMENTS

***Please see Asbestos report. Drywall joint compound throughout the house contains Regulated Asbestos Containing Materials (RACM). Removal of RACM must be completed by a licensed North Carolina Asbestos Abatement Contractor.

Work includes all removal of damaged drywall/wallboard/ceiling finish material throughout the house that contain RACM. OSHA requirements must be followed in regards to removal and disposal of RACM.

Bid Cost: X = 5 / 5

Base Quantity Total Cost

See Attached Lead Scope

GENERAL REQUIREMENTS

All work shall be performed in accordance with applicable regulations and shall meet all applicable building codes. Building permits will be obtained as appropriate. Mecklenburg County requires building permits for Lead Hazard Reduction if the work involves activities subject to permitting under general conducts.

Bid Cost: ____ X__ = ______

Base Quantity Total Cost

All Contractor's Project Requirements

GENERAL REQUIREMENTS

The contractor is responsible for all project requirements, including but not limited to:

All activities required by the City's COVID-19 Precautions for Residential Housing Rehabilitation Activities policy.

Obtaining all permits required. Said permits shall include all items in this scope of work.

Provide temporary toilet facilities from job start until the completion of work.

Provide AS MANY roll-off dumpsters as needed without damaging the site. Collect construction debris using dust control methods. Remove dumpsters and repair any evidence of the dumpster use.

Contractor may haul debris away daily using dump trailers or trucks.

Bid Cost: X = 53

Base Quantity Total Cost

Prep & Paint Ceiling

HALL

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked, and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with Owner's choice of low VOC acrylic flat latex in all habitable rooms and low VOC acrylic semi-gloss latex in kitchen and baths. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost: X = 355

Base Quantity Total Cost

Prep & Paint Ceiling

KITCHEN

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked, and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with Owner's choice of low VOC acrylic flat latex in all habitable rooms and low VOC acrylic semi-gloss latex in kitchen and baths. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost:		x	355
	Base	Quantity	Total Cost

Prep & Paint Room Semi Gloss

KITCHEN

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with owner's choice of low VOC acrylic SEMI-GLOSS latex. Painting shall include walls and any associated trim. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost: $X = \sqrt{90}$ Base Quantity Total Cost

Transition Plate Installation

KITCHEN

Install transition plate at change in floor finish materials or room boundaries. Transition plate shall be made of a finished wood, and be a wide-style plate (> 2" wide) to accommodate the change in floor level from the kitchen to the living room.



Bid Cost: X = 10

Slab Door Interior - Living Room to Kitchen

KITCHEN

Install a slab door to existing jamb, mortise in hinges and latch. Hole saw for the hardware. Include new hardware. Locking for bedrooms and bathroom, passage for all others. Match existing style and finish.



Bid Cost: X = \(\frac{1}{3} \)

Base Quantity Total Cost

Aluminum Storm Door - Kitchen Side Door

KITCHEN

Install an aluminum combination storm and screen door. Complete with self closer and locking hardware.



Bid Cost: $X = \frac{1}{2} \frac{0}{2}$ Base Quantity Total Cost

✓Prep & Paint Ceiling

LIVING ROOM

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked, and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with Owner's choice of low VOC acrylic flat latex in all habitable rooms and low VOC acrylic semi-gloss latex in kitchen and baths. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.

	Bid Cost: _	X		350
		Base	Quantity	Total Cost
Certification				
Contractor Name: G7B CONSTINE	Low	LC	Total Cost:	
Signature:	gagarore	*******************************	Date: 7	16-20

LEAD ABATEMENT SCOPE OF WORK & INSTRUCTIONS TO BIDDERS

1806 Irma St

Complete the following scope of work:

	complete the following scope of work.					
# .	Feature	Method	Quantity	Each	COST	
	Side A (above Window A5) - partially exposed white wood fascia	Repair or replace aluminum covering		150	150	
	Side B (above Window B1) - partially exposed white wood soffit	Repair or replace aluminum covering		150	150	
	Door A1 (to Room 1) - black and white wood door casings, header, jambs, stops and threshold	Replace door jambs, stopos and threhold and cover door facings and header with Tyvek and aluminum or vinyl		250	160207	150
	Closet Door B2 - white wood door, casings, header, jambs and stops	Replace door, jambs and stops and cover door casings and header with Tyvek and aluminum or vinyl		1 200	200	133
				TOT	'AL	•

- 1 Contractors may submit an occupant protection plan on the form provided.

 Contact Jim Roy if an additional form is needed
- 2 Complete all interior work in a unit in a single day. Any newly installed matarials shall be primed and painted.
- 3 Allow for replacement of 50 board feet of rotted wood.
- 4 Unless otherwise noted any window or door removal and replacement includes frame and trim on both sides.
- 5 In lieu of complete removal, window frames may be enclosed with vinyl on exterior in accordance with all project manual requirements
- 6 Contact Jim Roy to conduct inspections prior to repainting or other putback and after vinyl siding installation.
- 7 Windows being placed in a bathroom need to be tempered glass.

Total	Bid
-------	-----

Acknowledgement of Addenda (if any):

Addendum#	Date

The undersigned contractor agrees to perform the scope of work for the indicated fee in accordance with applicable regulations and the project manual. The undersigned also certifies that the work will be completed within 60 days of award.

Signature of authorized contractor representative

Contractor Submitting Bid: Address:

Phone:


GROUP CORPORATION

Providing integrated environmental and geotechnical solutions ROY CONSULTING

1806 Irma Street

Charlotte, NC 28216

SIDE C

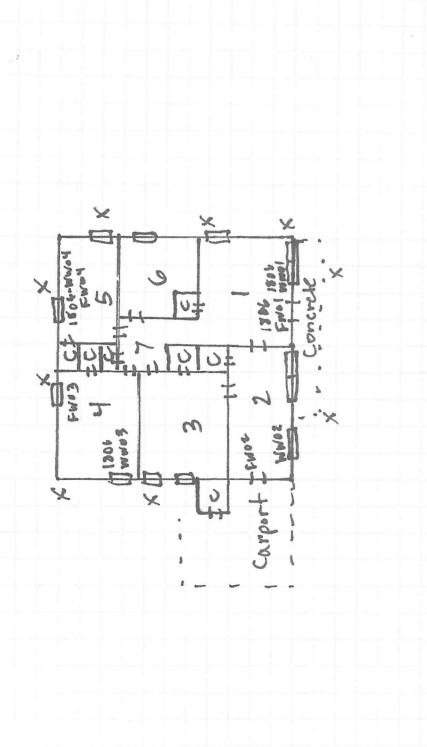

SIDE B

SIDE D

Legend

= Window = Door

= Soil Sample Location

SIDE A

NOT TO SCALE

Prepared By:

City of Charlotte Housing & Neighborhood Services 600 E. Trade Street Charlotte, NC 28202 (704) 336-7600

Property Details

Address:

1912 Irma St

Charlotte, NC 28216

Structure Type:

Single Unit

Square Feet:

876

Year Built:

1959

Property Value:

93100

Tax Parcel:

07504525

Census Tract:

Property Zone:

Council District 2

BATHROOM - MAIN

Emery Spears 25k

Cell: (704) 806-9731

Targeted FY19 (CDBG)

Healthy Homes Tested- NO LEAD

Install new vanity cabinet complete with counter top of laminate with vitreous china sink or marble-lite top with preformed sink. Include single handled metal faucet with drain and pop-up, P- trap, supply lines, full port ball type shut-off valves & escutcheon plates. Vanity medicine cabinet/mirror to remain.

Owner:

Owner Phone:

Program(s):



Vanity/ Counter Top/ Sink

Bid Cost: $X = \sqrt{90}$ Base Quantity Total Cost

Fiberglass Bathtub and Shower Surround

BATHROOM - MAIN

Install a 5' white Swan or equivalent 3-piece, fiberglass bathtub and surround. Caulk all seams and penetrations. Include new single handled tub/shower diverter valve and drain.

***Work shall also include filling in gap in floor tile following existing tub removal with white ceramic tile that complements existing ceramic floor tile. Existing flooring is to REMAIN IN PLACE.

***Removal of existing tub and tile surround requires use of an Asbestos Abatement contractor. Drywall compound contains Regulated Asbestos Containing Materials (RACMs). The price for asbestos abatement shall be listed in a separate line item.



Bid Cost: X = 1925Base Quantity Total Cost

Prep & Paint Room Semi Gloss

BATHROOM - MAIN

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with owner's choice of low VOC acrylic SEMI-GLOSS latex. Painting shall include walls and any associated trim. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.

	Bid Cost:	X	=	280
		Base	Quantity	Total Cost
Prep & Paint Ceiling			BATHROOM	- MAIN
Remove or cover hardware and accessories not to be fungus, dirt, and dust from surfaces. Fill holes and cra with Owner's choice of low VOC acrylic flat latex in all Replace or uncover hardware, fixtures and accessorie ***Drywall compound contains Regulated Asbestos Contains material requires use of an Asbestos Abatement tem.	cks. Prime all new mate habitable rooms and loves. Any moving of furnitu ontaining Materials (RAC	rials and spot p v VOC acrylic s re required sha CMs). Excessiv	rime existing with a emi-gloss latex in l Il be included. re sanding and/or o	acrylic latex. Top coa kitchen and baths. utting out damaged
	Pid Coot	v	_	245
	Bid Cost:	^ Base	=_ Quantity	Total Cost
Slab Door Interior			BEDROOM	
nstall a slab door to existing jamb, mortise in hinges a pedrooms and bathroom, passage for all others. Matcl			clude new hardwa	e. Locking for
	Bid Cost:			280
		Base	Quantity	Total Cost
/apor Barrier			CRAWL SPA	CE
ay 6 mil poly vapor barrier on ground in crawl space a	and 6" up foundation wa	lls. Overlap sea	ams by 2' and secu	re with duct tape.
	Bid Cost:	Y		770
	bid oost	Base	Quantity	Total Cost

Insulate Existing Ductwork

CRAWL SPACE

Insulate existing exposed ductwork to at least R-8. Insulation is to be secured with outward-clinching heavy-duty staples or approved alternative fastening system. Seams to be sealed against moisture intrusion using pressure-sensitive metallic tape.



Bid Cost: ____ X = \(\frac{1}{2} \) O5

Base Quantity Total Cost

Resilient Flooring

DEN

Install 25 year warrantied resilient floor covering per manufacturer's specifications. Include transitions and painted or stained wood quarter-round at all perimeters to complete installation.



Bid Cost: X = XOO

Prep & Paint Room Flat

DEN

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with owner's choice of low VOC acrylic FLAT latex. Painting shall include walls and any associated trim with SEMI-GLOSS latex. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost: X = 471

Base Quantity Total Cost

Repoint Masonry Bricks

EXTERIOR

Exterior

Rake out existing mortar joints to a minimum depth of 1/2". Completely fill mortar joints to match existing.



Bid Cost: X = 5 (a 1)

Base Quantity Total Cost

Demolition	0	Diamond	Dage	Dans	0	D-4:-
Demonuon	Ot	Disposal:	Rear	KOOT	Over	Patio

EXTERIOR

Exterior

Demolish existing roof structure, including support columns and ceiling materials, over rear patio area and make necessary repairs to create a new roof edge, possibly including installation of new ice and water shield and installation of new fascia boards and white aluminum fascia wrap, and construction of new soffit, including installation of white vinyl vented soffit. Demolished roof over the rear patio is not being rebuilt. Install new gutters and downspouts on any supporting horizontal fascia.



Bid Cost: X = 7777

Base Quantity Total Cost

Install Handrails - Rear Steps

EXTERIOR

Exterior

Install Code approved handrails constructed of wrought iron or black powder-coated aluminum on both sides of stairs.



Bid Cost: X = 1860Base Quantity Total Cost

Seamless Aluminum Gutter & Downspouts - Install

EXTERIOR

Exterior

Install K- type .027 gauge seamless aluminum gutter to service roof with sufficient pitch to downspouts. White or brown color choice by owner.



✓ Crawl Space Access Door

EXTERIOR

Exterior

Install a 3/4" pressure treated plywood access door in a 2" x 4" pressure treated frame. Provide galvanized iron hinges and hasp.

***Price is for (1) access door and another double access door.



Bid Cost: X = \(\frac{1}{5} \)

Base Quantity Total Cost

-		
POWER	Wach	Exterior
OAACI	vvasii	CALCITO

EXTERIOR

Exterior

Vinyl Siding & trim, as well as brick. Remove stains and dirt from exterior using high pressure water and detergent mix. Adjust pressure to eliminate damage to different exterior materials.



Bid Cost: ____ X __ = 350

Base

Quantity

Total Cost

Foundation Vent Screen

EXTERIOR

Exterior

Replace foundation vent housing with heavy duty galvanized steel screening.



Bid Cost: _____ X = 497

Base Quantity Total Cost

Hose Bibb

EXTERIOR

Exterior

Install a bronze hose bibb on outside of structure with inside shut-off valve and backflow preventer. Seal exterior penetration with silicone caulk.



Bid Cost: X = 350

Base Quantity Total Cost

Tear Off & Reroof Shingles

EXTERIOR

Exterior

Remove and dispose of existing roofing, inspect and repair roof deck (include 96 sq.ft. of decking replacement in bid) and install new 30 year architectural shingles. Include ice and water shield at all roof edges, felt paper, shingle over ridge vent, boots, flashing and all necessary accessories.



Bid Cost: X = Total Cost

Replace Receptacles, Switches, and Plates

GENERAL REQUIREMENTS

Replace all receptacles, switches and cover plates throughout entire house. Use code appropriate devices. This also includes any wall or ceiling damage repairs.



Bid Cost: X = 1050

Electric Service 200 AMP

GENERAL REQUIREMENTS

Replace electrical service with new 200 amp, main disconnect, 110/220 volt, 24 circuit panel board, meter socket, weather head, service cable, ground rods and cable. Include replacement of all sub-panels. Caulk exterior service penetration.



Bid Cost: ____ = 7,800

Base Quantity Total Cost

Gas Pack

GENERAL REQUIREMENTS

Install combination AC/furnace unit, minimum 14 SEER design per manual J and Manual D for this home.



Bid Cost: X = Total Cost

Asbestos Abatement Scope

GENERAL REQUIREMENTS

***Please see Asbestos report. Drywall joint compound throughout the house contains Regulated Asbestos Containing Materials (RACM). Removal of RACM must be completed by a licensed North Carolina Asbestos Abatement Contractor.

Work includes prep and painting several areas in the interior, as well as removing the existing bathtub and surround. OSHA requirements must be followed in regards to disturbing, removal and disposal of RACM.

Bid Cost: X = Total Cost

See Attached Lead Scope

GENERAL REQUIREMENTS

All work shall be performed in accordance with applicable regulations and shall meet all applicable building codes. Building permits will be obtained as appropriate. Mecklenburg County requires building permits for Lead Hazard Reduction if the work involves activities subject to permitting under general conducts.

Bid Cost: X = 5 6 0

Base Quantity Total Cost

All Contractor's Project Requirements

GENERAL REQUIREMENTS

The contractor is responsible for all project requirements, including but not limited to:

All activities required by the City's COVID-19 Precautions for Residential Housing Rehabilitation Activities policy.

Obtaining all permits required. Said permits shall include all items in this scope of work.

Provide temporary toilet facilities from job start until the completion of work.

Provide AS MANY roll-off dumpsters as needed without damaging the site. Collect construction debris using dust control methods. Remove dumpsters and repair any evidence of the dumpster use.

Contractor may haul debris away daily using dump trailers or trucks.

	Bid Cost:	x		1,520
		Base	Quantity	Total Cost
Cabinets Base			KITCHEN	
Replace base cabinets. Cabinets to be constructed of solid guidelines & specifications for full requirements. ***Select unfinished cabinets and stain to match existing was ***Dishwasher is to be removed and not replaced. Please to	all cabinets as clos	e as possible.	ard allowed. See	contractor's manual
	Bid Cost:	x	=	2,250
	<u> </u>	Base	Quantity	Total Cost
Counter Tops Replace			KITCHEN	
Screw to base cabinet a square edged plastic laminate cou adjoining walls with low VOC caulking to match wall color. ***Use caution to not damage existing backsplash.				lk counter top to
	Bid Cost:	х	=	1,050
		Base	Quantity	Total Cost

GFCI Receptacle 20 AMP

KITCHEN

Install a flush mounted, ground fault circuit interrupted, duplex receptacle and cover plate. Fish wire and repair all tear out as needed.

***Count is for (2) outlets.




Bid Cost: X = 540Base Quantity Total Cost

Prep & Paint Ceiling

KITCHEN

Remove or cover hardware and accessories not to be painted. Scrape loose, peeling, cracked, and blistered areas. Clean oil, grease, fungus, dirt, and dust from surfaces. Fill holes and cracks. Prime all new materials and spot prime existing with acrylic latex. Top coat with Owner's choice of low VOC acrylic flat latex in all habitable rooms and low VOC acrylic semi-gloss latex in kitchen and baths. Replace or uncover hardware, fixtures and accessories. Any moving of furniture required shall be included.



Bid Cost: _____ X ___ = ____

Double Bowl Sink Complete

KITCHEN

Install a 18 gauge 33" x 22" x 8" double bowl, stainless steel, self rimming kitchen sink including a single handle metal body faucet, rated at 2.0 GPM or less, with a 15 year drip- free warranty, P-trap, supply lines, full port ball type shut-off valves & escutcheon plates on all supply & drain lines. No copper compression fittings.



Bid Cost: X = 560Base Quantity Total Cost

Resilient Flooring

KITCHEN

Install 25 year warrantied resilient floor covering per manufacturer's specifications. Include transitions and painted or stained wood quarter-round at all perimeters to complete installation.



Bid Cost: X = 6 00 D

Base Quantity Total Cost

Floor System Repair

KITCHEN

Remove all fixtures not built in. Dispose of damaged/unsafe components of floor assembly. Work may include installation of 2"x 8" joists hung 16" on center, plywood or tongue and groove subfloor. Include replacing all deteriorated band joists and insulating floor to code.



Bid Cost: X = Total Cost

Resilient Flooring

LAUNDRY

Install 25 year warrantied resilient floor covering per manufacturer's specifications. Include transitions and painted or stained wood quarter-round at all perimeters to complete installation.



Bid Cost: _____X = 300

Water Heater 40 Gallon Electric

LAUNDRY

Install a 40 gallon, glass lined, high recovery insulated to R-7, double element, electric water heater with 10 year warranty. Include pressure and temperature relief valve, expansion tank, discharge tube to within 6" of floor or to outside of structure, shut-off valve and electric supply. If it is located on an upper floor or if there is no floor drain, install a catch pan drained to the exterior. Dispose of old water heater appropriately.



Bid Cost: X = 1575Base Quantity Total Cost

Resilient Flooring

LIVING ROOM

Install 25 year warrantied resilient floor covering per manufacturer's specifications. Include transitions and painted or stained wood quarter-round at all perimeters to complete installation.



Bid Cost: X = 1,015Base Quantity Total Cost

Certification

Contractor Name:

Total Cost: 58,563 2

Signature:

Date: 7-16-20

LEAD ABATEMENT SCOPE OF WORK & INSTRUCTIONS TO BIDDERS

1912 Irma St

Complete the following scope of work:

Item#	Feature	Method	Quantity	Each	COST
	Room 1 - Elevated Lead Dust Levels on Floor	Clean all floors throughout entire house	Quartery	1	560
					TOTAL

- 1 Contractors may submit an occupant protection plan on the form provided. Contact El Group if an additional form is needed
- 2 Complete all interior work in a unit in a single day. Any newly installed matarials shall be primed and painted.
- 3 Allow for replacement of 50 board feet of rotted wood.
- 4 Unless otherwise noted any window or door removal and replacement includes frame and trim on both sides.
- 5 In lieu of complete removal, window frames may be enclosed with vinyl on exterior in accordance with all project manual requirements
- 6 Contact EI Group to conduct inspections prior to repainting or other putback and after vinyl siding installation.
- 7 Windows being placed in a bathroom need to be tempered glass.

Total Bid

Acknowledgement of Addenda (if any):	
Addendum#	Date


The undersigned contractor agrees to perform the scope of work for the indicated fee in accordance with applicable regulations and the project manual. The undersigned also certifies that the work will be completed within 60 days of award.

Signature of authorized contractor representative

Contractor Submitting Bid:

Address:

Phone:

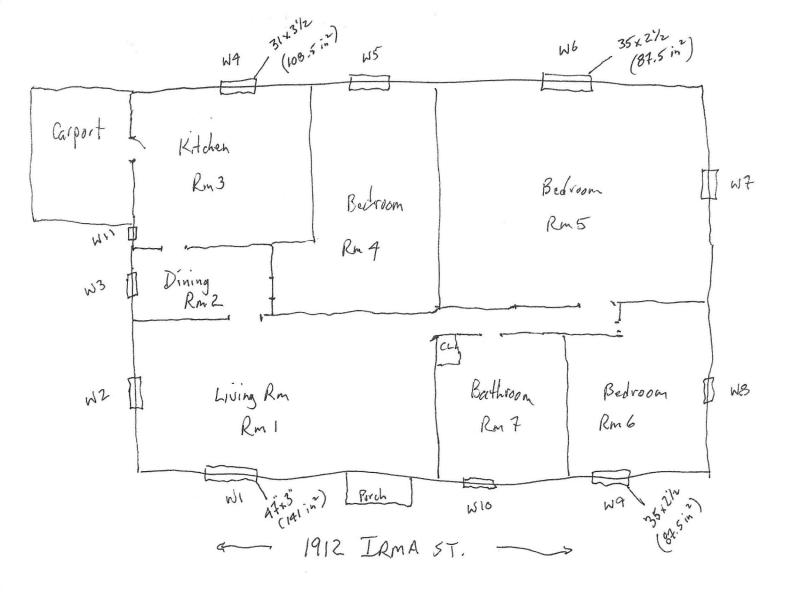



Addendum 1 Invitation to Bid HNS 21-3

NOTE: Contractors are not authorized to visit the property before or after the bid walk, without being accompanied by the City's Rehabilitation Specialist.

Documents included in Package:

- 1) Instruction to Bidders
- 2) Specs by Location/Trade (Scope of Work)
- 3) Subcontractor Certifications (if applicable)
- 4) Floor Plan / Site Drawing (if applicable)

GTB

Bid Walk & Bid Opening:

Project Address:	
1900 Garibaldi Ave	
Bid Walk: 7/9/2020 at 9:00 am (THURSDA)	()
Bid Opening: 7/16/2020 at 2:00 pm (THURS	SDAY)
Client Name: Mark Smagner	Rehab and Lead
Project Manager: Elizabeth Lamy	Contact Number: 704-620-9090

Bid Walk and Bidding Instructions:

All bid walks are mandatory.

If you are going to be late the policy is the following:

Contact me BEFORE the start time if you are going to be late. If you are going to be more than 10 minutes late, we will proceed without you and you will not be permitted to bid.

The day of a bid walk the best way to reach me is at 704-620-9090.

Bids must be received by the date, time and place specified. All others will be considered non responsive and disqualified.

The Bids will be received via email no later than the above-mentioned date and time. Emailed bids will not be opened until the listed Bid Opening time.

G:\SELECTIVE REHAB TEAM\forms\bid forms and documents\Invitation to bid WARREN



Company Acknowledgement:

The undersigned, having become thoroughly familiar with the terms, conditions, limitations, and provisions of the housing improvement work to be performed at 1900 Garibaldi Ave to be funded through the City of Charlotte Housing & Neighborhood Services, in addition, having fully inspected the site in all particulars, hereby proposes and agrees to fully perform the work within the time stated and in strict accordance with the proposed contract documents including furnishing of any and all labor and materials, and to do all work required to complete said Work in accordance with the advised respective contractual, for the sum of money:

Please Print and Sign:	
Company Name/Firm:	Construction LLC
Authorized Representative Name:	Milton Boom
Signature: MMBun	Date: 7-16-20



Requirements For Bidders

The City awards rehabilitation bids to the lowest responsive and responsible bidder. A responsible bidder for the safe home program is one who:

- 1) Is a licensed general contractor in the State of North Carolina;
- 2) Has an Renovate, Repair & Paint Certification (http://www2.epa.gov/lead/renovation-repair-and-painting-program);
- 3) Is not listed on a local, state or federal debarment list:
- 4) Carries an appropriate amounts of insurance;
- 5) Can provide references verifying the contractor has completed work of a similar scope in a good workmanship like manner or successfully completed prior work for the Safe Home program. Referenced work must have been completed in one year or less from date of this invitation to bid.

A responsive bidder must:

- 1) Submit all requested documentation on time;
- Meet the above requirements for responsibility at the time of bid submittal;
- 3) Have the capacity to meet the required schedule for the project.
- 4) Existing rehab projects contracted by the contractor must be on schedule.

The City reserves the right to waive any minor informalities or irregularities, which do not go to the heart of the bid submittal or prejudice other offers, or to reject, for good and compelling reasons, any or all bid submittals.

Elizabeth Lamy Santos
Rehabilitation Specialist
City of Charlotte
Housing & Neighborhood Services
600 E. Trade St.
Charlotte, NC 28202
PH: (704) 336-3333 desk
(704) 620-9090 cell
elamy@charlottenc.gov



TLC by CLT CITY OF CHARLOTTE

HOUSING & NEIGHBORHOOD SERVICES

http://housing.charlottenc.gov | 600 E. Trade Street | Charlotte, NC

Prepared By:

City of Charlotte Housing & Neighborhood Services 600 E. Trade Street Charlotte, NC 28202 (704) 336-7600

Property Details					
Address:	1900 Garibaldi Ave Charlotte, NC 28208	C	wner:	Mark Smagner	
0//		C	wner Phone:	Cell: (919) 607-6770)
Structure Type:	Single Unit	P	rogram(s):	Healthy Homes	
Square Feet:	1046			Tested- HAS LEAD Targeted FY19 (CD	BG)
Year Built:	1940			3-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1	
Property Value:	75600				
Tax Parcel:	06707128				
Census Tract:					
Property Zone:	Council District 3				
GFCI Receptacle 20	AMP			BATHROOM	I - MAIN
Install a flush mounte	ed, ground fault circuit interrupted, c	duplex receptacle ar	nd cover plate.	Fish wire and repair a	all tear out as needed.
		Bid Cost:		x \ =	225 MB
			Base	Quantity	Total Cost
Vapor Barrier				CRAWL SPA	ACE
	barrier on ground in crawl space an currently installed, but is missing/da			seams by 2' and secu	re with duct tape.
		Bid Cost:	-	X =	600
			Base	Quantity	Total Cost
Gable End Trim Rep	pair			EXTERIOR	Exterior
Replace missing trim	piece on right side gable end to ma	atch existing style.	Caulk, prep an	d paint. Match existin	g material and color.
			_		Baras.
	*	Bid Cost:		X =	acousty 5
			Base	Quantity	357 R

Tear Off & Reroof Shingles

EXTERIOR

Exterior

Remove and dispose of existing roofing, inspect and repair roof deck (include 96 sq.ft. of decking replacement in bid) and install new 30 year architectural shingles. Include ice and water shield at all roof edges, felt paper, shingle over ridge vent, boots, flashing and all necessary accessories.

***Work shall also include installation of a new ridge vent (there currently is not one installed).

***Work shall also include abandoning vent for a whole house attic fan as it is no longer in service.

	Bid Cost: _		x	3,375
		Base	Quantity	Total Cost
Combination CO / Smoke Detector Hard Wired				REQUIREMENTS
Install a hard wired combination carbon monoxide and smoke	e detector with b	attery back ι	ıp.	
	Bid Cost:		_x1 :	225
		Base	Quantity	Total Cost
Smoke Detector Hard Wired				REQUIREMENTS
Install UL approved, interconnected, ceiling mounted smoke a battery backups in bedrooms and outside of sleeping areas. ***Count is for (3) detectors.	and heat detecto	rs permaner	ntly wired into a rece	ptacle boxes with
	Bid Cost:		x 3	675
	_	Base	Quantity	Total Cost
Electric Service 200 AMP			GENERAL	REQUIREMENTS
Replace electrical service with new 200 amp, main disconnect service cable, ground rods and cable. Include replacement of	ct, 110/220 volt, 2 of all sub-panels.	24 circuit pai Caulk exteri	nel board, meter soc or service penetratio	ket, weather head,
	Bid Cost:	ť	_x	7,700
		Base	Quantity	Total Cost
Exterminate Termites			GENERAL	REQUIREMENTS
Exterminate for termites. Drill and patch foundation and paver year guarantee with an optional yearly renewable warranty fo			rminator must be lice	ensed and provide a 1
	Bid Cost:	4	Χ	975
		Base	Quantity	Total Cost

Replace Receptacles, Switches, and Plates

GENERAL REQUIREMENTS

Replace all receptacles, switches and cover plates throughout entire house	. Use code appropriate devices.	This also includes any
wall or ceiling damage repairs.		5000

Bid Cost: ___ = X ==

Base

Quantity

Total Cost

See Attached Lead Scope

GENERAL REQUIREMENTS

All work shall be performed in accordance with applicable regulations and shall meet all applicable building codes. Building permits will be obtained as appropriate. Mecklenburg County requires building permits for Lead Hazard Reduction if the work involves activities subject to permitting under general conducts.

Bid Cost:

Base

Quantity

Total Cost

All Contractor's Project Requirements

GENERAL REQUIREMENTS

The contractor is responsible for all project requirements, including but not limited to:

All activities required by the City's COVID-19 Precautions for Residential Housing Rehabilitation Activities policy.

Obtaining all permits required. Said permits shall include all items in this scope of work.

Provide temporary toilet facilities from job start until the completion of work.

Provide AS MANY roll-off dumpsters as needed without damaging the site. Collect construction debris using dust control methods. Remove dumpsters and repair any evidence of the dumpster use.

Contractor may haul debris away daily using dump trailers or trucks.

Bid Cost:

Poo

Quantity

Total Cost

Electric Tabletop Water Heater

KITCHEN

Install a 38-gallon electric tabletop water heater. Unit shall be insulated, have a glass-lined tank and temperature and pressure relief valve. Water heater shall have a 6-year warranty.



Bid Cost:

Ras

Quantity

Total Cost

GFCI Receptacle 20 AMP

KITCHEN

Install a flush mounted, ground fault circuit interrupted, duplex receptacle and cover plate. Fish wire and repair all tear out as needed.

***Price shall be for changing out (3) existing outlets and one new circuit.



Bid Cost:		X	3	=	675	
	Base		Quantity		Total Cost	

Certification

Contractor Name: Milton Brown

Total Cost: 13,315 (2)

Signature:

Date: 7-16-20

LEAD ABATEMENT SCOPE OF WORK & INSTRUCTIONS TO BIDDERS

1900 Garibaldi Ave

Comp	loto	tha	following	gscone	nf	wor	k.

	complete the following scape of mann			et.	cost 75
Item #	Feature	Method	Quantity	Each	COST
1	Exterior - Side A, Window 3 Casing	Scrape loose paint and re-paint		1	343
2	Exterior - Side C Door Jamb	Scrape loose paint and re-paint		1	3432
					TOTAL

1 Contractors may submit an occupant protection plan on the form provided.

Contact EI if an additional form is needed

- 2 Complete all interior work in a unit in a single day. Any newly installed matarials shall be primed and painted.
- 3 Allow for replacement of 50 board feet of rotted wood.
- 4 Unless otherwise noted any window or door removal and replacement includes frame and trim on both sides.
- 5 In lieu of complete removal, window frames may be enclosed with vinyl on exterior in accordance with all project manual requirements
- 6 Contact EI to conduct inspections prior to repainting or other putback and after vinyl siding installation.
- 7 Windows being placed in a bathroom need to be tempered glass.

Total Bid

Acknowledgement of Addenda (if any):	Date
Addendum#	Date


The undersigned contractor agrees to perform the scope of work for the indicated fee in accordance with applicable regulations and the project manual. The undersigned also certifies that the work will be completed within 60 days of award.

Signature of authorized contractor representative

Contractor Submitting Bid: Address:

Phone:

Notes:

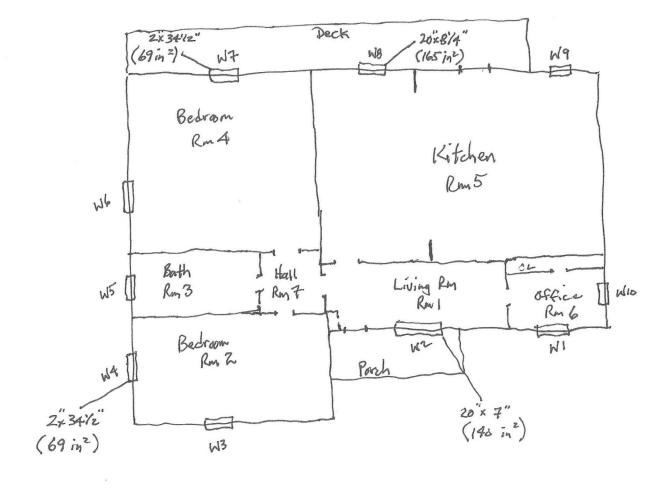

1900 Garibaldi He